




LC ROLL OVER UNIBOOT CONNECTOR

THE SIMPLEST, FASTEST AND SAFEST POLARITY REVERSAL METHOD

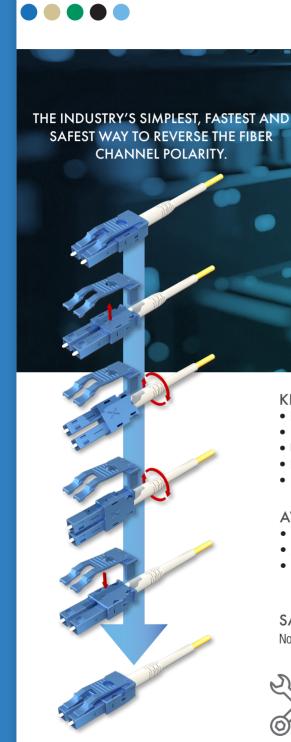

KEY FEATURES

- Polarity reversal without requiring a jig
- Insertion loss (typical); 0.2dB or less
- UL94V-0 flammability grade
- RoHS and REACH compliant
- IEC61754-20, TIA/EIA 604-10A, GR-326-CORE compliant

AVAILABLE OPTIONS

- SM and MM types available
- Available for 2.0mm, 3.0mm and 5.0mm cables type
- Standard boot and flex angle boot types available

SAFEST POLARITY REVERSAL METHOD

No fiber is exposed during the polarity reversal process.



No Tools Required



No Delicate Handwork Required







APPLICATIONSData Centers

Active Device Termination

Telecommunication Networks

Gigabit Ethernet

Private Networks



PIONEERING CUSTOM FIBER OPTIC SOLUTIONS FOR YOUR UNIQUE NEEDS

