

PLUGGABLE PLC SPLITTER

AVAILABLE COLORS



ULTRA-COMPACT DESIGN | PLUG-AND-PLAY CONNECTION



Developed to offer the easiest way to upgrade the number of channels in confined spaces, the SANWA Pluggable PLC Splitter with LC receptacle and MT ferrule will allow for saving optical node or module space.

SPECIFICATIONS

Connector Type: LC (UPC) to MPO
 Channel Number: 1x8, 1x12, 1x16
 Available Colors: White, Blue, Green


APPLICATIONS

FTTx
 LAN, CATV
 Telecommunication Network

PARAMETERS		UNIT	1x8	1x12	1x16
Operating Wavelength		nm	1260 ~ 1650		
Insertion Loss	Max.	dB	10.5	12.5	14
Uniformity	Max.	dB	0.3	0.5	0.7
Polarization Dependent Loss	Max.	dB	0.3		
Return Loss	Min.	dB	60 (UPC)		
Directivity	Min.	dB	55		
Operating Temperature		°C	-40 ~ +85		
Storage Temperature		°C	-40 ~ +85		
Dimensions		mm	16.5 (W) x 90 (L) x 8.75 (D)		

KEY FEATURES AND BENEFIT

- Easy to upgrade the number of channels
- LC and MPO pluggable
- Compact design - saves optical node or module space

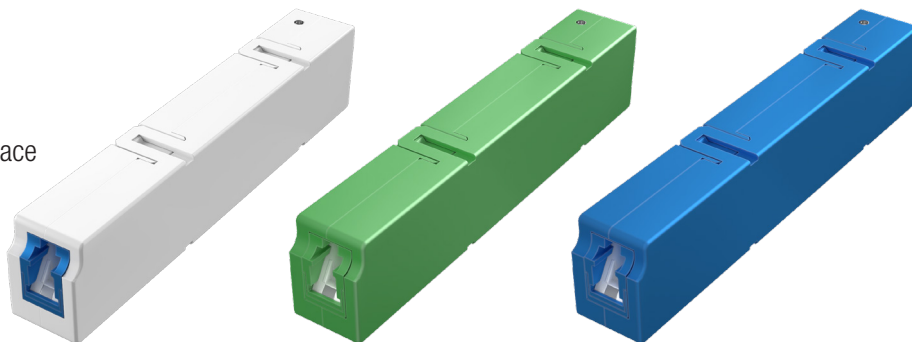

PIONEERING CUSTOM FIBER OPTIC SOLUTIONS FOR YOUR UNIQUE NEEDS



Toll free number 1-855-SNW-TECH
 Please contact your local sales representative for further details or questions.

sales@snwtech.com
 www.sanwa-tech.com