

PLUGGABLE PLC SPLITTER

AVAILABLE COLORS



ULTRA-COMPACT DESIGN | PLUG-AND-PLAY CONNECTION

Developed to offer the easiest way to upgrade the number of channels in confined spaces, the SANWA Pluggable PLC Splitter with LC receptacle and MT ferrule will allow for saving optical node or module space.

SPECIFICATIONS

Connector Type: LC (UPC) to MPO
 Channel Number: 1x8, 1x12, 1x16
 Available Colors: White, Blue, Green


APPLICATIONS

FTTX
 LAN, CATV
 Telecommunication Network

PARAMETERS		UNIT	1x8	1x12	1x16
Operating Wavelength		nm	1260 ~ 1650		
Insertion Loss	Max.	dB	10.5	12.5	14
Uniformity	Max.	dB	0.3	0.5	0.7
Polarization Dependent Loss	Max.	dB	0.3		
Return Loss	Min.	dB	50 (UPC)		
Directivity	Min.	dB	55		
Operating Temperature		°C	-40 ~ +85		
Storage Temperature		°C	-40 ~ +85		
Dimensions		mm	16.5 (W) x 90 (L) x 8.75 (D)		

KEY FEATURES AND BENEFIT

- Easy to upgrade the number of channels
- LC and MPO pluggable
- Compact design - saves optical node or module space

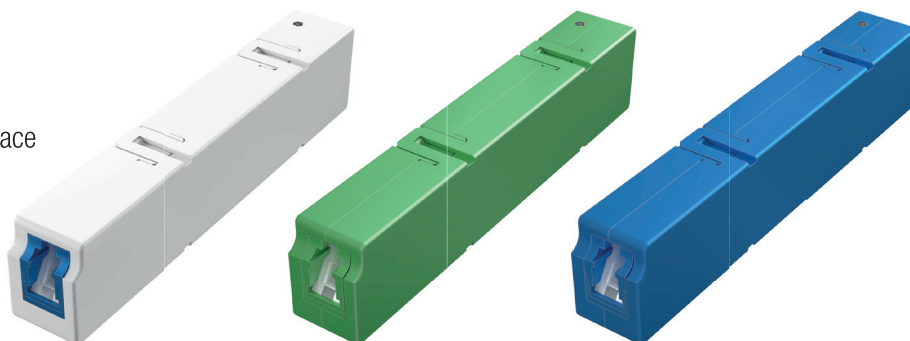

SANWA Technologies, Inc.

www.sanwa-tech.com
sales@snwtech.com

Americas Sales-TX
 4012 Preston Rd.
 Plano, TX 75093
 Tel: +1 (972)-503-3031
 Fax: +1 (972)-503-3032

Americas Sales-MA
 287 Turnpike Road
 Westborough, MA 01581
 Tel: +1 (508)-616-9500
 Fax: +1 (508)-616-9600

Europe Sales
 Aleja Armii Krajowej 61, Bud. C,
 50-541 Wrocław, PL
 Tel: +48 71 7277237
 Fax: +48 71 7939911

Asia Sales
 13F, Changxing Rd., Luzhou Dist.,
 New Taipei City 247, Taiwan
 (R.O.C.)
 Tel: +886 939512000
 Fax: +886 2 8285450